

SB 70 6m MW1 80 N2 W4 B

surface mounted on asphalt

K733137B


PRODUCT DATA SHEET


Performance class	N2 W4 B
Working width	1,3 m
Vehicle intrusion	- (- m)
Dynamic deflection	0,9 m
Tested system length	102 m
EC Certification report	92731

System series	SB 70 Series
Tension bar	MW180
Design	Generation 2

Element length	6 m
System height	70 cm
System width	30 cm
Element weight/length	1.235 kg / 6 m

Mode of operation	double sided
Mode of installation	surface mounted on asphalt
Additional features	-
Terminal anchoring	no
Installation drawing	K733137-EN

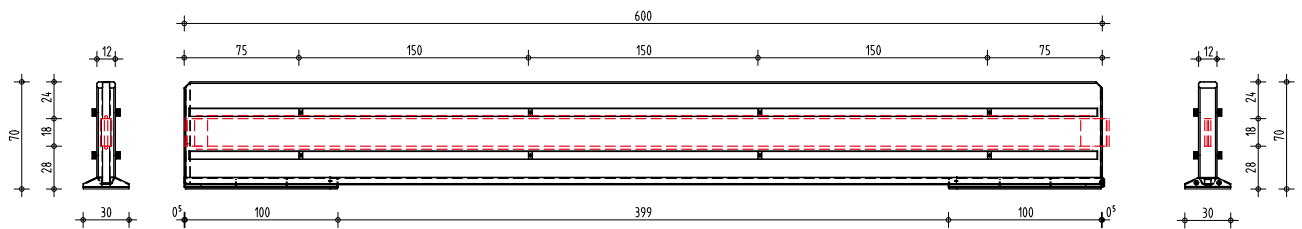

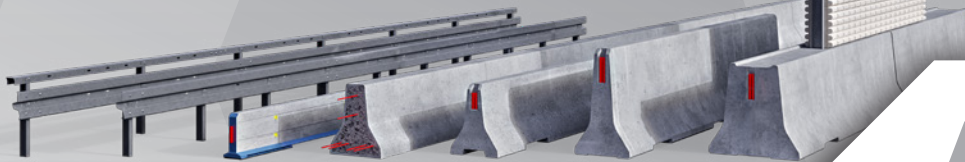

SB 70 6m MW1 80 H1 W5 B

surface mounted on asphalt

K733137A


PRODUCT DATA SHEET

Performance class	H1 W5 B
Working width	1,4 m
Vehicle intrusion	VI5 (1,4 m)
Dynamic deflection	1,2 m
Tested system length	102 m
EC Certification report	in elaboration

System series	SB 70 Series
Tension bar	MW180
Design	Generation 2

Element length	6 m
System height	70 cm
System width	30 cm
Element weight/length	1.235 kg / 6 m

Mode of operation	double sided
Mode of installation	surface mounted on asphalt
Additional features	-
Terminal anchoring	no
Installation drawing	K733137-EN

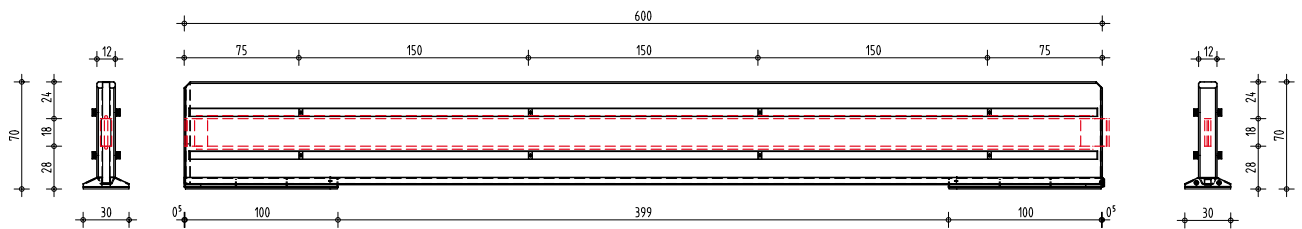

THE ULTRALIGHT SB SERIES PROTECTS WITH MODULAR SAFETY

The holistic safety concept
for a state of the art work zone protection.



KIRCHDORFER
ROAD & TRAFFIC



DELTA BLOC INTERNATIONAL GmbH

Industriestrasse 28
2601 Sollenau, Austria
office@deltabloc.com
+43 57715 / 470 - 0
www.deltabloc.com