

SB 70B 6m MW180 H1 W4 B

surface mounted on asphalt

K733287A


PRODUCT DATA SHEET


Performance class	H1 W4 B
Working width	1,3 m
Vehicle intrusion	VI5 (1,5 m)
Dynamic deflection	1,0 m
Tested system length	90 m
EC Certification report	in elaboration

System series	SB 70 Series
Tension bar	MW180
Design	Generation 2

Element length	6 m
System height	70 cm
System width	30 cm
Element weight/length	1.730 kg/6 m

Mode of operation	double sided
Mode of installation	surface mounted on asphalt
Additional features	with DB Mesh
Terminal anchoring	yes
Installation drawing	K733287-EN

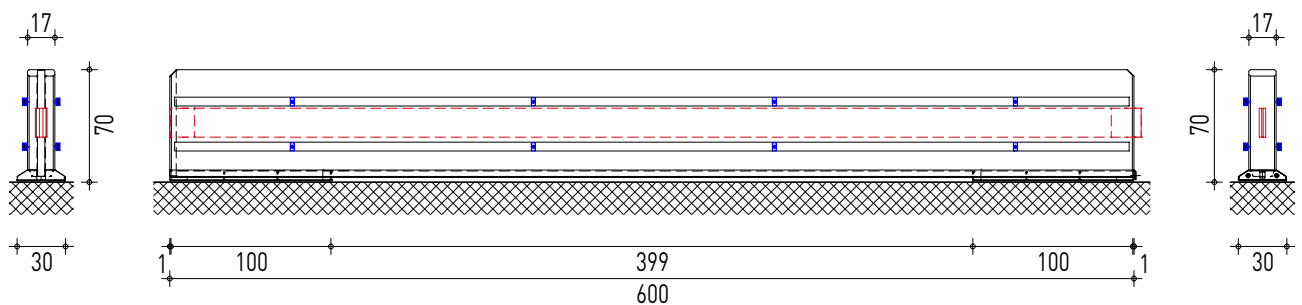

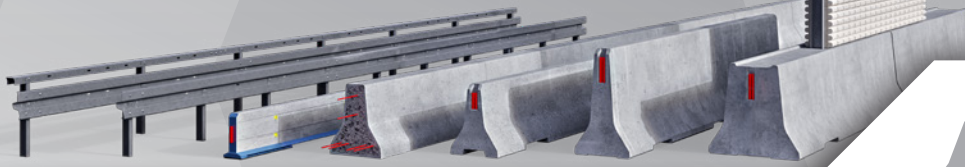

SB 70B 6m MW180 T3 W1 A

surface mounted on asphalt

K733287B


PRODUCT DATA SHEET

Performance class	T3 W1 A
Working width	0,6 m
Vehicle intrusion	VI1 (0,6 m)
Dynamic deflection	0,3 m
Tested system length	108 m
EC Certification report	-

System series	SB 70 Series
Tension bar	MW180
Design	Generation 2

Element length	6 m
System height	70 cm
System width	30 cm
Element weight/length	1.730 kg/6 m

Mode of operation	double sided
Mode of installation	surface mounted on asphalt
Additional features	with DB Mesh
Terminal anchoring	no
Installation drawing	K733287-EN

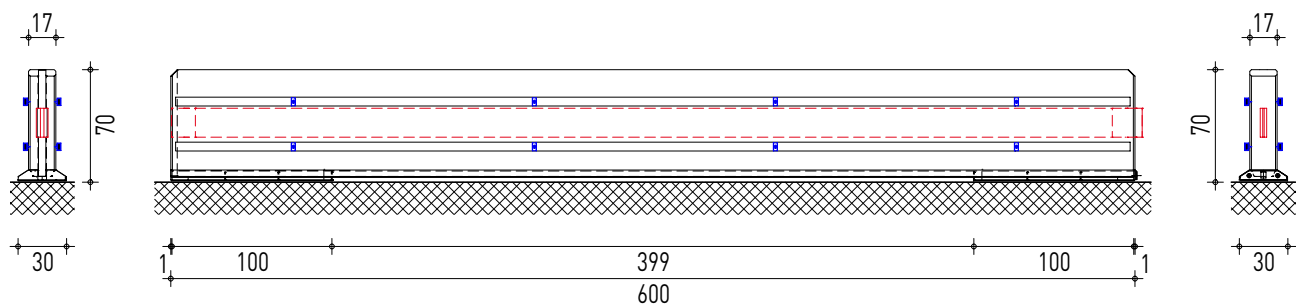

THE ULTRALIGHT SB SERIES PROTECTS WITH MODULAR SAFETY

The holistic safety concept
for a state of the art work zone protection.



KIRCHDORFER
ROAD & TRAFFIC



DELTA BLOC INTERNATIONAL GmbH

Industriestrasse 28
2601 Sollenau, Austria
office@deltabloc.com
+43 57715 / 470 - 0
www.deltabloc.com